

gosund



WiFi Smart Plug Instruction
EP2



Since the device only supports 2.4G Wi-Fi connection, please ensure that the mobile phone and the device are connected under 2.4G Wi-Fi simultaneously.

What's in the Box

1. Wi-Fi Smart Plug
2. User Manual
3. After-sale card
4. Connectivity Guidelines

At a Glance



- ① ON/OFF Button
- ② Flame Resistant Material
- ③ Power Plug
- ④ Socket Panel

Specification

Model: EP2
 Rated Voltage: 230V~50/60Hz
 Rated Current: 10A Max.
 Wi-Fi frequency: 2.4GHz
 Power Output: 2300W Max.
 Frequency Range: 2412-2472 MHz
 Wi-Fi Max. Transmitting Power: 20 dBm

Main Features



How to download the Gosund App

Option 1: Search for "Gosund" in the Apple APP Store or Google Play.

Option 2: Scan the QR code below to enter the download page.



How to Pair with the Gosund App

1. Open the "Gosund" APP and create your Gosund account.
2. Turn on the plug and put it close to the router when pairing.
3. Press and hold the ON/OFF button for 5 seconds and release it when the plug starts blinking fast to enter the network pairing mode.

You can add a device in two ways.


Option 1. Tap "+" on the upper right corner and select "Auto Scan".

Option 2. Tap "+" on the upper right corner to select "Add Manually", and then select "Power Strip (Wi-Fi)". Follow the App instructions to complete the operation.


How to Connect to Alexa

Note: Support 2.4GHz Wi-Fi only.




1. Make sure your Alexa device is powered on and connected to a Wi-Fi network.
2. Open Amazon Alexa APP and select "skills & Games", as shown in the figure below.

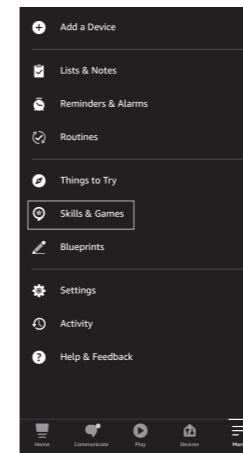


3. Click "Search" icon and enter "Gosund" as shown in the following figure.

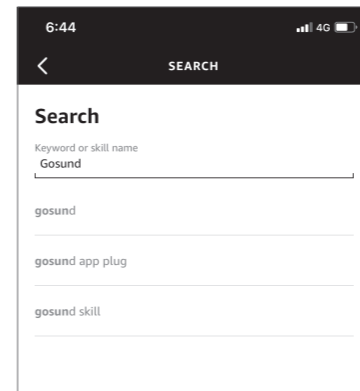

4. Find "Gosund", click "enable" and contact your Gosund account to enable skill. As shown in the figure below:

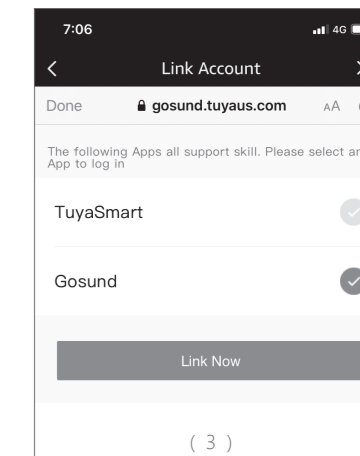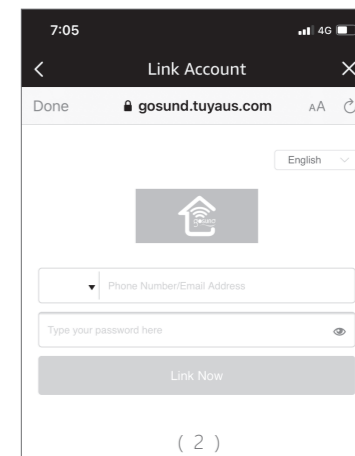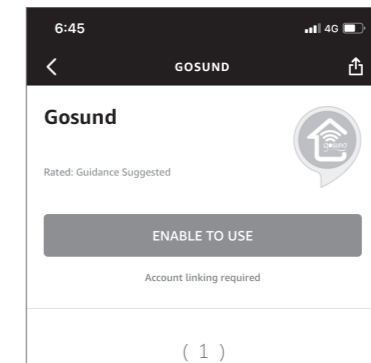

5. Then the device can be controlled through Alexa.

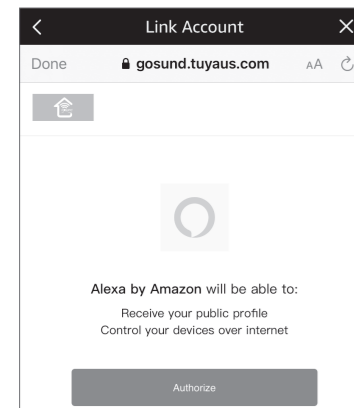


6. Now you can begin your smart home journey. Operation Video Link: <https://youtu.be/6aY8jhjE0A8>


How to Connect Gosund Devices to Google Assistant

Note: Support 2.4GHz Wi-Fi only.


1. Open the Google Assistant APP and login in.
2. Tap your account name of the upper right corner.

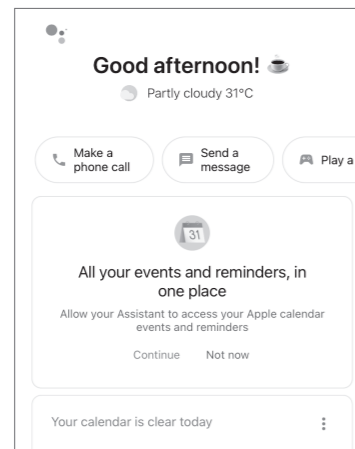


3. Click "Devices" to add devices.

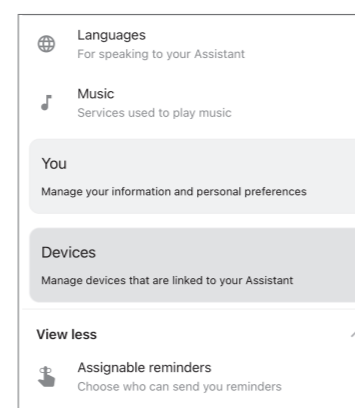


4. Find "Link a smart home device" and click it.

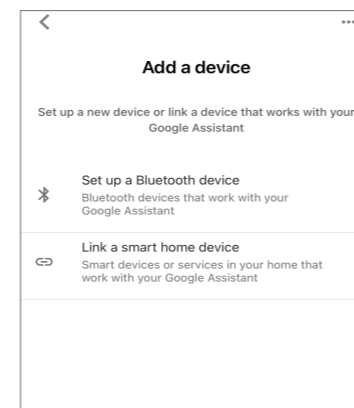

5. Enter "Gosund" to search and click the "Gosund smart".

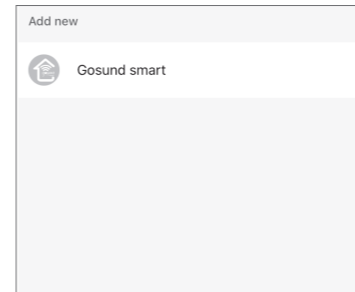

6. Enter your Gosund APP account and password, then tap "Link Now".

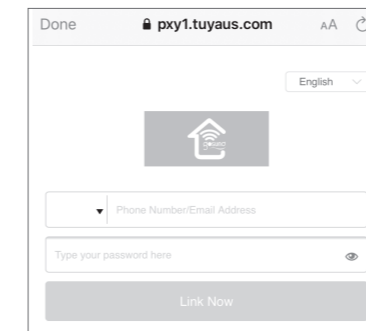

7. Now you can begin your smart home journey. Operation video link: <https://youtu.be/LgCPRFsFUpE>

Reset

Turn on the power, hold the Switch/Pairing for 8 seconds and let go when the socket starts to flash quickly, the reset is successful.

When the socket is in a new network environment, you need to restore the factory settings, and then reconnect to the network.

Warnings and Precautions Important!

- Keep it out of the reach of children and pets.
- Do not use this product in humid environments or outdoors. It's for indoor use only.
- Do not place this product near heating devices, such as microwave ovens, or radiators.
- Protect the product from extreme temperatures.

direct sunlight, strong jolts high humidity, moisture, flammable gases, vapors and solvents.

- Do not disassemble, modify, or repair your device, and ask help from the authorized professionals for device malfunction.
- Do not use the device when it is no longer working properly or visibly damaged.
- Do not store the device for extended periods in poor ambient conditions.
- Do not insert your device to another one.
- Never use aggressive detergents such as rubbing alcohol or other chemical solutions because these could damage the casing or even impair the functioning of the product.

Note: The image shown in the manual is indicative only. If there is inconsistency between the image and the actual product, the actual product shall govern.

WEEE Disposal and Recycling Information

All products bearing this symbol are waste electrical and electronic equipment (WEEE as in directive 2012/19/EU) which should not be mixed with unsorted household waste. Instead, you should protect human health and the environment by handing over your waste equipment to a designated collection point for the recycling of waste electrical and electronic equipment, appointed by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences to the environment and human health. Please contact the installer or local authorities for more information about the location as well as terms and conditions of such collection points.

Manufacturer: Shenzhen Cuco Smart Technology Co.,Ltd
 Address: Room201, 301, Building A, No.12, Difu Road, Guxing Community, Xi Xiang Street, Bao'an District, Shenzhen, China. 518000.
 Website: www.gosund.net
 Email Support: service.eu@gosund.com



Made in China